

Spirit Battery Power Output Set User Manual

Introduction

Thanks for purchasing ePropulsion Spirit Battery Power Output Set. It is suitable for the Spirit battery and Spirit battery plus. It is used to supply power to accessories, for example, electric steering or inflatable pump. Please read the user manual before use.

In the box

T connector X1
 Battery Activator X1
 User Manual X1


Specification

Operation Temperature	-10~60°C
Storage Temperature	-20~60°C
Certification	CE、 FCC

Operation

- Open the protective covers at both ends of the T connector;
- Insert the battery end of the T connector into the battery;
- Connecting terminals and other accessories;
- Insert the Spirit Battery Activator into the T connector.

**Max output 200W
 Protect with 5 Amps fuse**

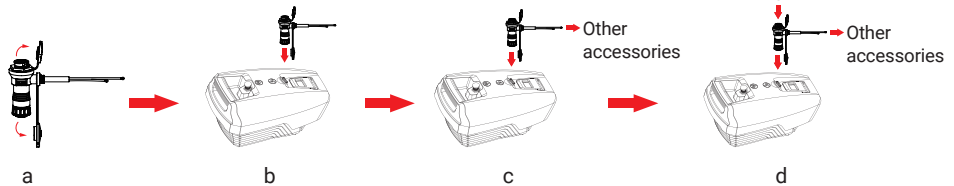

Note

- Battery Activator is only available for the battery not under the sleep mode. If the battery level is low for a long time, it will enter sleep mode. Charge to wake it up.
- As the power switch, the battery activator must be connected to the T connector after checking the cable is connected correctly.
- Cover both the protective covers after use and keep it dry.
- Do not disassemble or put the product into the fire.
- Do not drop, impact, puncture or squeeze the product.
- This product is output under 40V (Spirit battery) or 48V (Spirit battery plus). If it is used for the product under other voltages, please transform the voltage by yourself.
- Error Code of Battery Activator:

Error	Description
EE	No output due to battery failure
EC	Communication failure with the battery

Warranty

ePropulsion Spirit Battery Power Output Set is guaranteed against any manufacturing defects for **TWO years** from the date of purchase.

Free warranty is only validated upon the presentation of both the legal serial number, evidence of purchase from an authorized ePropulsion dealer, and registration on the following website:

<https://www.epropulsion.com/product-registration/>

If the problem occurs, please consult your ePropulsion authorized dealer for assistance.

Conditions:

1. Valid date of purchase should be established by the first-hand purchaser with the original sales slip.
2. The warranty is valid only when the information is correct and complete.

Warranty does not cover:

1. Minor faults producing no influence on the intended function of the product.
2. Faults resulting from any improper operation that contradicts the user manual.
3. Damage caused by accident, misuse or unauthorized repair.
4. Damage caused by dropping, liquid damage, improper care or storage.